



TYPICAL REGULATORY SIGNS

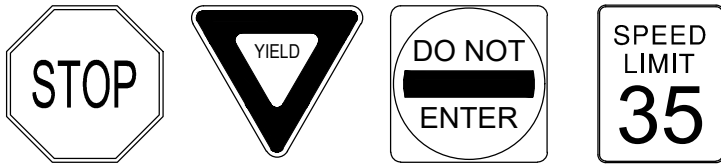

SIGN SIZES	APPROACH TYPE	
	SINGLE LANE	MULTI-LANE
R1-1 (STOP)	30" x 30"	36" x 36"
R1-2 (YIELD)	36" x 36" x 36"	48" x 48" x 48"
R5-1 (DO NOT ENTER)	30" x 30"	36" x 36"
R2-1 (SPEED LIMIT)	24" x 30"	30" x 36"


* FOR OTHER TYPES OF REGULATORY SIGNS CONSULT THE MUTCD

CROSSWALK SIGNS

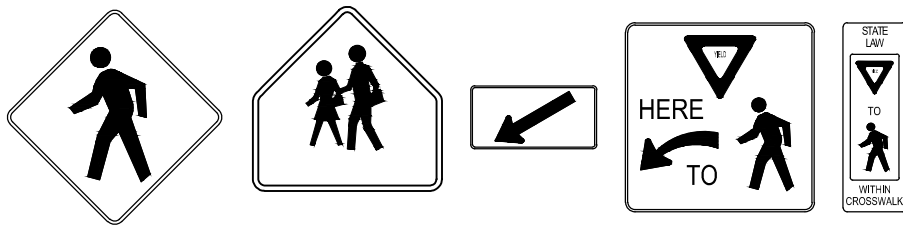

SIGN SIZES	APPROACH TYPE	
	SINGLE LANE	MULTI-LANE
W11-2 (PEDESTRIAN)	30" x 30"	36" x 36"
S1-1 (SCHOOL)	36" x 36"	36" x 36"
W16-7P (ARROW PLAQUE)	24" x 12"	24" x 12"
R1-5 (YIELD HERE TO PEDS)	36" x 36"	36" x 36"
R1-6/R1-6B (IN-STREET CROSSING)	12" x 36"	12" x 36"

POST-MOUNTED STREET NAME SIGN (D3-1)

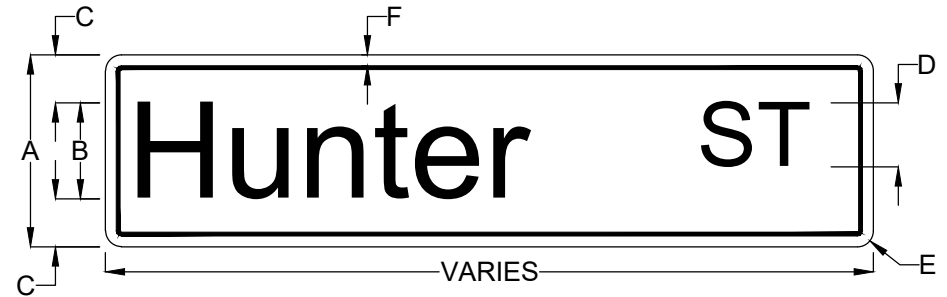

SIGN TYPE	SIGN DIMENSIONS					
	A	B	C	D	E	F
STANDARD	9"	6"	1.5"	4"	0.75"	0.5"
MULTI-LANE (> 40 MPH)	12"	8"	2"	6"	0.75"	0.5"

NOTES:

1. SHEETING MATERIAL FOR ALL SIGNS SHALL BE HIGH INTENSITY PRISMATIC (HIP) TYPE IV MULTI-LAYER SHEETING.
2. ALL STREET NAME SIGNS INSTALLED IN RESIDENTIAL AREAS SHALL COMPLY WITH STANDARD DIMENSIONS. STREET NAME SIGNS SHALL BE GREEN WITH WHITE LEGEND AND BORDER. LETTERING SHALL BE COMPOSED OF UPPER AND LOWER-CASE LETTERS. LOWER-CASE LETTERS SHALL BE 75% THE HEIGHT OF UPPER-CASE LETTERS. STREET SUFFIXES SHALL BE UPPER-CASE LETTERS. FONT TYPE SHALL BE HIGHWAY GOTHIC SERIES C. 36-INCH BLADES SHALL BE STANDARD FOR STREET NAMES, WITH 15 CHARACTERS OR LESS.
3. STREET NAME SIGNS SHALL BE FABRICATED USING WHITE (HIP) SHEETING AS A BASE LAYER WITH GREEN (HIP) SHEETING OVERLAYED. THE LEGEND SHALL BE DIGITALLY CUT OR PRINTED FROM THE OVERLAY LAYER.
4. SCHOOL CROSSING SIGNS SHALL HAVE A FLUORESCENT YELLOW-GREEN BACKGROUND WITH BLACK LEGEND AND BORDERS.
5. IF IN-STREET CROSSING SIGNS ARE USED IN SCHOOL AREAS, R1-6B SIGN SHALL BE USED INSTEAD OF R1-6 SIGN.
6. REFER TO MUTCD FOR ALL OTHER GUIDANCE.